




### Features

- A-scan Display for Waveform Verification
- Wide Thickness Range: 0.003" to 20.000" (0.08 mm- 508.00 mm)
- Resolution up to 0.0001" (0.001 mm)
- Uses Contact, Delay Line, and Immersion transducers
- Internal Alphanumeric File-Based Data-logger stores 18,000 thickness or 1,750 waveforms
- Application Auto-Recall with Stored Standard and Custom Setups

### Multilayer Fuel Tank Measurement

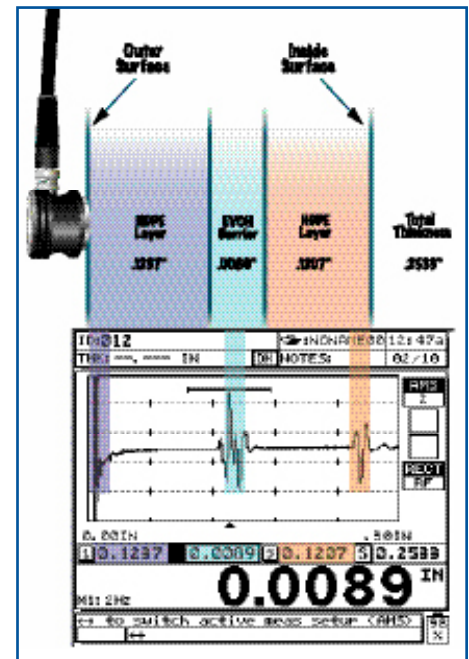

## Precision Thickness Gage for Multilayer Materials

The Panametrics-NDT™ Model 25 MULTI PLUS is an advanced ultrasonic precision thickness gage with several unique measurement capabilities. In addition to making thickness measurements on metal, plastic and many other materials with varying thickness ranges, the 25 MULTI PLUS has the ability to calculate and simultaneously display up to four separate measurements. The Summation Mode accurately displays total thickness of selected layers.

Another unique feature of the 25 MULTI PLUS is the Barrier Layer Mode. This feature makes it possible to measure critical barrier layers in multilayer plastic parts such as gas fuel tanks and bottle

preforms. This special Mode displays the thickness of thin barrier layers that are typically too difficult to measure with conventional ultrasonic thickness gages because of lack of separation between the echo from the front and back of the barrier layer.

The 25 MULTI PLUS is ideal for the following applications:

- Multilayer fuel tanks
- Multilayer plastic bottle preforms
- Calculating radius of curvature and the thickness of contact lenses
- Multilayer aircraft windows
- Co-extruded plastic
- Two layer hot tubs and spas
- Two layer automotive air intake ducts

The 25 MULTI PLUS calculates and simultaneously displays thickness measurements of up to four individual layers. It also displays total thickness of selected layers.

The 25 MULTI PLUS measures thickness of barrier layers in applications such as plastic fuel tanks and bottle preforms.

## 25 Multi Plus Specifications\*

### Measurement

**Mode 1:** Time interval between excitation pulse and first backwall echo, using contact transducers.

**Mode 2:** Time interval between the first interface echo after the excitation pulse and the first backwall echo, using delay line or immersion transducers.

**Mode 3:** Time interval between successive backwall echoes following the first interface echo after the excitation pulse, using delay line or immersion transducers.

**Thickness Measurement Range:**

Steel: 0.006 - 20.000 inches  
(0.150 - 508.00 mm)†

Plastic: 0.003 - 2.0000 inches  
(0.08 -50.00 mm)†

**Thickness range depends on material, transducer, surface condition, temperature, and SETUP selected.**

**Barrier Layer Plastic Mode:** Only for Mode 1 and 2, Thickness Range  
0.004 – 0.020 inches (0.100 – 0.50 mm).\*

**Multilayer Measurement Mode:**  
Simultaneously displays up to four thickness measurements.

**Summation Mode:** Displays the sum of up to three layer thickness measurements.

**Material Velocity Range:**

0.02000 - 0.55110 inch/μS  
(0.5080 - 13.9979 mm/μS)

**Resolution:** (keypad selectable)

LOW: 0.01" 0.1 mm

STANDARD: 0.001" 0.01 mm

HIGH: 0.0001" 0.001 mm

**Transducer Frequency Range:**

2-30 MHz (-3 dB)

**Min/Max Mode**

**Two Alarm Modes:** Programmable Hi-Low Alarm with audible and visual indicators

- 1) Standard Hi-Low
- 2) Previous thickness

**-Absolute**  
**-Percentage**

**Two Differential Modes:**

- 1) Thickness difference between actual measurement and reference value
- 2) Percent difference between actual measurement and reference value

**Application Auto-Recall:** Automatically adjusts internal parameters and zero offset for a wide variety of transducers.

**Stored Standard Setups:** 25 stored transducer setups to allow fast, easy calibration for our standard transducers.

**Stored Custom Setups:** Up to 35 stored custom transducer setups for best performance in special applications.

### Power Supply

**Battery:** 6 V Rechargeable NiCad battery pack

**Battery Life:** 25 hours in normal measurement mode with backlight off

**Fast-Charger:** Two-hour Fast Charger with universal voltage

### General

**Keypad:** Sealed color-coded keypad with tactile and audible feedback

**Case:** Water-resistant, gasketed Lexan® case with sealed connectors

**Metric/English Units**

**Auto Power Off:** On or off

**Size:** 9.375" x 5.45" x 1.5"  
(238 x 138 x 38 mm)

**Weight:** 2.1 lbs. (0.95 kg)

**Operating Temperature:**  
-10°C to +50°C. (+14°F to 122°F)

### Display

**Display:** Liquid crystal display with backlight. Contrast keypad adjustable. Display area 4.0" x 3.39" (102 x 86 mm)

**Backlight, Zoom Mode, Freeze Mode and Hold/Blank**

**Rectification:** RF, half wave positive or negative, and full wave

**Waveform Display Range and Delay Control**

### Internal Datalogger

**Datalogger and RS-232:** Identifies, stores, recalls, clears, and transmits thickness readings, waveform images, and gage setup information via the RS-232 Serial Port. Baud Rate, Word Length, Stop Bits, and Parity are adjustable from the keypad.

**Maximum # of Stored Values:**

**Standard:** 18,000 thickness readings or 1,750 waveforms with thickness

**Upgrade 1:** 36,000 thickness readings or 3,400 waveforms with thickness

**Upgrade 2:** 54,000 thickness readings or 5,100 waveforms with thickness

**Location Codes:** 8-character file name plus 16-character alphanumeric location code input. Multiple Comments per location.

**File Structures:** 7 standard or custom application-specific file structures

**Reports:** On-gage reporting of summary with statistics, Min/Max with locations, and File Comparison. On-screen comparison of current and previous readings.

### Standard Inclusions

**Model 25 MULTI PLUS Digital Ultrasonic Multilayer Thickness Gage, AC or Battery Operation, 50-60Hz, with Internal Alphanumeric Datalogger.**

**Including:** Universal Quick Charger/AC Adapter, Transducer Cable, Test Block, Couplant, RS-232 I/O Cable, Carrying Case Instruction Manual and a Two Year Limited Warranty

### Optional Accessories

**PLUS/RPC:** Rubber Protective Case with Stand/ Straps

**36DLP/SPC/KIT:** Protective Pouch with Neck Strap

**GAGEVIEW:** Interface Program

**25DLP/EW:** Extended Limited Warranty, 3rd Year

**2214E:†** 5-Step Test Block, 1018 steel, English Units: .100", .200", .300", .400", .500"

**2213E:†** 5-Step Test Block, Aluminum, English Units: .100", .200", .300", .400", .500"

**26DLPLUS/HDC:** Heavy Duty Shipping Case

†Please contact us for other accessories available with the Model 25 MULTI PLUS.

[www.olympusNDT.com](http://www.olympusNDT.com)  
[info@olympusNDT.com](mailto:info@olympusNDT.com)

 PANAMETRICS-NDT

**OLYMPUS®**

**OLYMPUS NDT**  
48 Woerd Avenue • Waltham, MA 02453 • USA  
Tel.: (1) 781-419-3900 • Fax: (1) 781-419-3980  
12569 Gulf Freeway • Houston, TX 77034 • USA  
Tel.: (1) 281-922-9300 • Fax: (1) 952-487-8877

**OLYMPUS NDT U.K. LTD.**  
12 Nightingale Close • Rotherham, South Yorkshire S60 2AB • UK

**OLYMPUS SINGAPORE PTE. LTD.**  
491B River Valley Road 12-01/04, Valley Point Office Tower, 248373 • Singapore

**OLYMPUS AUSTRALIA PTY. LTD.**  
PO Box 985 • Mount Waverley, VIC 3149 • Australia

